


# PLANT LOW LOADERS



The AW range of Plant Low Loader Trailers have tandem axles under a flat bed with a beaver tail and fold down rear ramps for easy loading. It is designed to carry wheeled or tracked plant and equipment including diggers and excavators. Available with several different options making this a very versatile trailer.

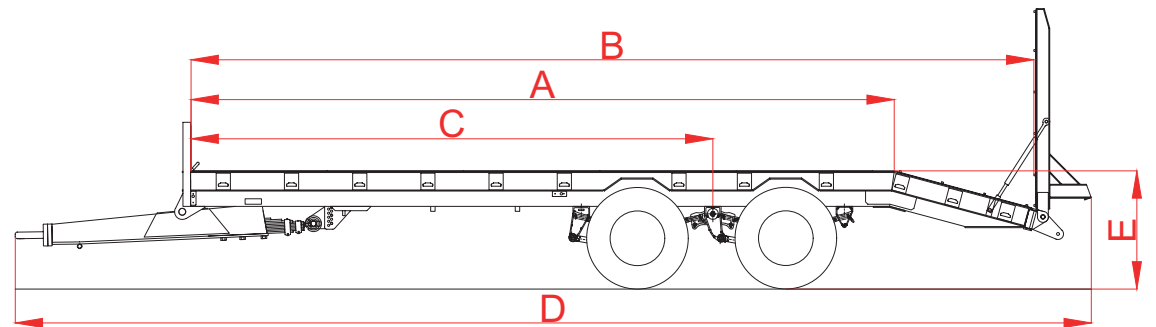

## STANDARD FEATURES

- Heavy-Duty Fixed Headboard
- Maintenance Free LED Lights
- Hydraulic Brakes & Ratchet Parking Brake
- Heavy-Duty PFC Side Channels with Laser Cut Lasing Points
- Shot Blasted
- 4.5mm Thick Treadplate floor
- Removable Skid
- 2 Pack Primer & Top Coat
- Sprung Assisted Loading Ramps
- Heavy Duty Multi-Leaf Sprung Axles

|                                | 10T PLL                 | 12T PLL                   | Ultima<br>16T PLL         | Ultima<br>18T PLL         | Ultima<br>22T PLL            |
|--------------------------------|-------------------------|---------------------------|---------------------------|---------------------------|------------------------------|
| Bed Length (Flat) (A)          | 3660mm/12'              | 4810mm/15'10"             | 6300mm/20'8"              | 7185mm/23'6"              | 7795mm/25'6"                 |
| Bed Length (Inc Tail) (B)      | 4920mm/16'2"            | 6080mm/20'                | 7650mm/25'                | 8535mm/28'                | 9145mm/30'                   |
| Floor Thickness<br>Tread Plate | 4.5mm                   | 4.5mm                     | 4.5mm                     | 4.5mm                     | 4.5mm                        |
| Floor Thickness<br>Soft Wood   | 50mm/2"                 | 50mm/2"                   | 50mm/2"                   | 50mm/2"                   | 50mm/2"                      |
| Chassis                        | 200 x 75 PFC            | 250 x 150 RHS             | 250 x 150 RHS             | 250 x 150 RHS             | 250 x 150 RHS                |
| Axle Size                      | 80mm 6 Stud<br>(Tandem) | 127mm 10 Stud<br>(Tandem) | 127mm 10 Stud<br>(Tandem) | 127mm 10 Stud<br>(Tandem) | 127mm 10 Stud<br>(Tri-Axle)* |
| Brake Size                     | 300 x 60                | 406 x 120                 | 420 x 180                 | 420 x 180                 | 420 x 180                    |
| Wheel Track                    | 2000mm/79"              | 2000mm/79"                | 2000mm/79"                | 2000mm/79"                | 2000mm/79"                   |
| Tyre Size                      | 12.5/80 x 15.3          | 435/50R19.5               | 435/50R19.5               | 435/50R19.5               | 435/50R19.5                  |
| Wheel Position (C)             | 3000mm/9'10"            | 3850mm/12'8"              | 4850mm/15'11"             | 5440mm/17'10"             | 5850mm/19'2"                 |
| O/a Length (D)                 | 6350mm/20'10"           | 7620mm/25'                | 9110mm/29'11"             | 9995mm/32'10"             | 10605mm/34'10"               |
| O/a Width                      | 2500mm/8'2"             | 2500mm/8'2"               | 2500mm/8'2"               | 2500mm/8'2"               | 2500mm/8'2"                  |
| Bed Height (E)                 | 1050mm/3'5"             | 1070mm/3'6"               | 1110mm/3'8"               | 1110mm/3'8"               | 1110mm/3'8"                  |
| Unladen Weight                 | 2.5 Tonne<br>Approx.    | 3.2 Tonne<br>Approx.      | 4.5 Tonne<br>Approx.      | 4.8 Tonne<br>Approx.      | 5.3 Tonne<br>Approx.         |

\*Tri-Axle fixed axle as standard, Steering axle available as an option. For all options see pages 36 & 37  
16T and above are available with optional Hydraulic Beaver tail, which is 2440mm/ 8ft long as standard.

Minimum overall bed length for a Plant Low Loader with a hydraulic beavertail is 8535mm/28'