


STONE & RUBBLE



The AW Stone and Rubble Trailers are designed to carry earth, stone and rubble. Ideal Trailer to be on any construction site.

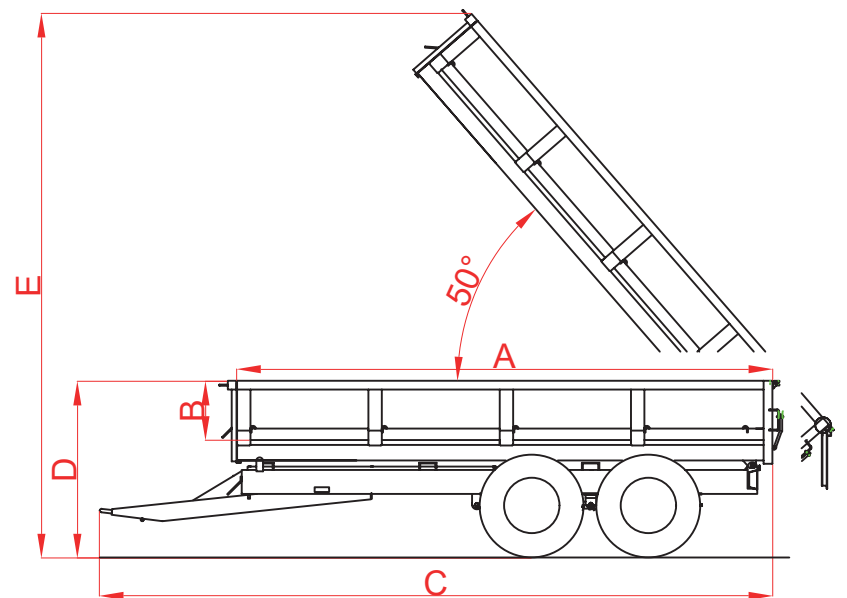

STANDARD FEATURES

- Large Capacity Tapered (6"/150mm Front to Back) Body with Smooth Interior
- Channels Forming Strong Ribs Around Sides & Floor
- High-Capacity Hydraulic Tipping Rams
- Maintenance Free LED Lights
- 90 x 90 Thick Walled RHS Box Top Runners
- Heavy Duty Rope Hooks
- Hydraulic Brakes & Ratchet
- Heavy Duty Multi-Leaf Sprung Axles
- Shot Blasted
- 6mm Thick Floor & 6mm Thick Sides
- 90 x 90 Thick Walled RHS Box Corner Posts
- Extra Floor Supports
- Front Inspection Steps
- 2 Pack Primer & Top Coat
- Body Prop
- Heavy Duty Rope Hooks
- Removable Skid
- Parking Brake

	6.5T S&R	8T S&R	10T S&R	14T S&R	Ultima 18T S&R
Length (Internal) (A)	3660mm/12'	4300mm/14'	4710mm/15'6"	5505mm/18'	6100mm/20'
Width (Internal)	2210mm/7'3"	2210mm/7'3"	2210mm/7'3"	2210mm/7'3"	2275mm/7'6"
Height (B)	610mm/2'	610mm/2'	610mm/2'	610mm/2'	610mm/2'
Cubic Capacity	4.92m ³ /147ft ³	5.8m ³ /203ft ³	6.35m ³ /225ft ³	7.42m ³ /261ft ³	9.2m ³ /320ft ³
Chassis	180 x 75 PFC	250 x 150 RHS	250 x 150 RHS	250 x 150 RHS	250 x 150 RHS
Axle Size	80mm 6 Stud (Single)	80mm 6 Stud (Tandem)	80mm 8 Stud (Tandem)	127mm 10 Stud Commercial (Tandem)	127mm 10 Stud Commercial
Brake Size	300 x 60	300 x 60	350 x 60	406 x 120	420 x 180
Wheel Track	1900mm/75"	2000mm/79"	2000mm/79"	2000mm/79"	2000mm/79"
Tyre Size	12,5/80 x 15.3	12.5/80 x 15.3	385/65R22.5	385/65R22.5	560/60R22.5
O/a Length (C)	5080mm/16'8"	5800mm/19'	6250mm/20'6"	7045mm/23'	7645mm/25'1"
O/a Width	2455mm/8'1"	2455mm/8'1"	2455mm/8'1"	2455mm/8'1"	2455mm/8'1"
O/a Height (D)	1600mm/5'3"	1780mm/5'10"	1850mm/6'1"	1880mm/6'2"	2040mm/9'1"
Max Tipped Height (E)	3920mm/12'10"	4380mm/14'5"	5010mm/16'5"	5650mm/18'7"	6250mm/20'6"
Unladen Weight	2.4 Tonne Approx.	3.0 Tonne Approx.	3.9 Tonne Approx.	4.5 Tonne Approx.	5.3 Tonne Approx.

For Ultima Xtra (Hardox) upgrade & optional extras, see pages 36 & 37